



THE RIGHT PUMP FOR
TOUGH JOBS

G SERIES

**GRINDER PUMPS
FOR SEWAGE, INDUSTRIAL & AGRICULTURAL USE**





BJM QUIET RUNNING G SERIES GRINDER PUMPS ARE A QUALITY SOLUTION FOR PUMPING HOUSEHOLD, INDUSTRIAL AND AGRICULTURAL WASTES.

BJM quiet running grinder pumps; premium construction at an affordable price.

- Hardened chrome iron (650 BHN) grinder and grinder ring stay sharp.
- BJM air filled pump motors are built to last. Class F motor insulation, high amp and high temperature overload protection reduce motor failures.
- Double mechanical seals, with abrasive resistant Silicon Carbide lower seal and Carbon Ceramic upper seals, protect motors.
- Seal Minder™ probe standard on all G series to detect seal wear before seal failure.
- Double lower bearings to handle higher radial loads.
- 208 and 575V available



Accessories: Pump slide rails, level switches, pump controls and alarm boxes are available for all G series grinder pumps.

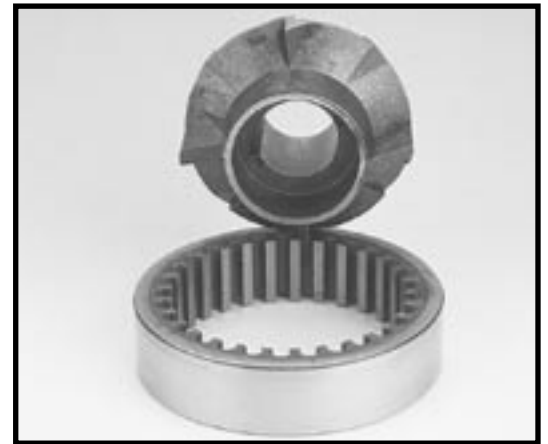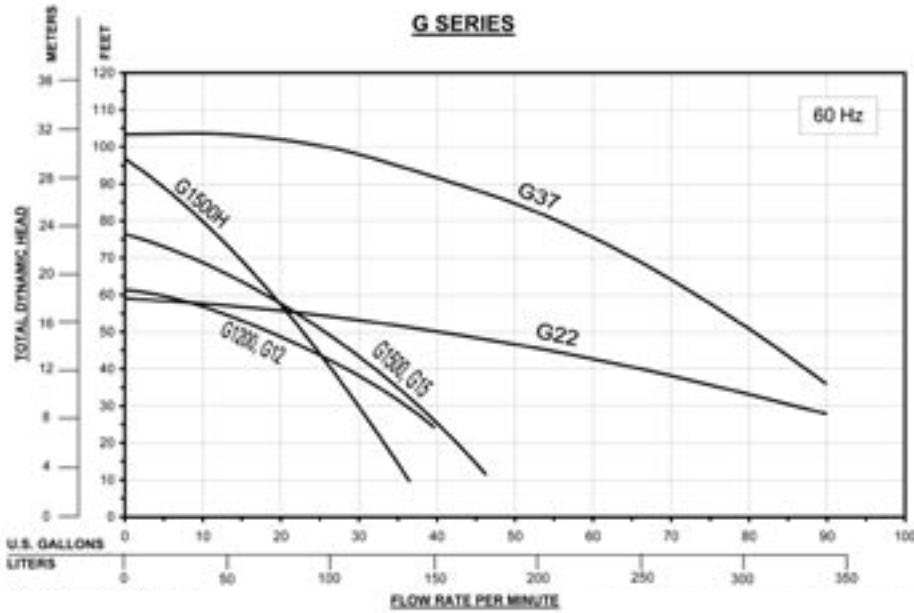

BJM's chrome iron grinder assembly can be serviced without pump disassembly. Grinding ring is reversible for longer wear life.

MODEL	DISCH. SIZE	H.P.	VOLT	PHASE	RPM	RATED AMPS	MAX HEAD	MAX GPM	WEIGHT LBS.	HEIGHT	WIDTH	CABLE
G1200	1.25"	1.5	230	1	3450	10	61'	40	78	18.11"	12.25"	33'
G1500	1.25"	2	230	1	3450	14	76'	46	90	22"	12.25"	33'
G1500H	1.25"	2.5	230	1	3450	17	97'	37	95	22"	12.25"	33'
G12	1.25"	1.5	230/460	3	3450	4.6/2.3	61'	40	71	17.72"	12.25"	33'
G15	1.25"	2	230/460	3	3450	6/3	76'	46	80	19.5"	12.25"	33'
G22	2"	3	230/460	3	3450	9/4.5	59'	90	113	20.5"	14.5"	33'
G37	2"	5	230/460	3	3450	14/7	103'	90	124	22"	14.5"	33'

WARNING: NOT FOR USE IN ANY FLAMMABLE LIQUIDS.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

 <p>123 Spencer Plain Road P.O. Box 1138 Old Saybrook, CT 06475</p> <p>Tel: (860)-399-5937 Toll Free: (877)-BJM-PUMP Fax: (860)-399-7784</p> <p>Web: www.bjmpumps.com</p>	<p>Distributor:</p>
--	---------------------